

DURABLE

L I G H T I N G

Flexible Neon | Smart Wall Washer | Flexible Strip Light

DURABLE LIGHTING CO.,LTD.

✉ sales@durablelighting.com.cn

☎ +86 755 2322 6401

📍 1708, Xinlong plaza, No.126 New District Avenue, Longhua, Shenzhen, 518101, China



About Our Company

Founded in 2015, Durable Lighting Co.,Ltd. is a professional manufacturer of premium linear lighting products integrated by self-development, manufacturing and selling. Our main products are flexible LED strip lights, flexible silicon extrusion neons and aluminum linear lighting, etc..

Sticking to the philosophy of 'keep innovation, maintain high quality, supply excellent service', our company has gained superb reputation worldwide with the products widely used in hotel, museum, outdoor advertisement, facade, landscape lighting and residential decorations.

Lighting is the soul of a building. From the day of establishment, we have been constantly devoting ourselves to R&D, dedicating to use our expertise to create more comfortable, minimalistic, reliable, efficient and environmental friendly lighting products to the whole world. After years of endless efforts paid, Durable Lighting is growing rapidly nowadays and has taken leading positions in a variety of subdivided fields.

Today, we have a cover area of 10,000m² with automatic and semi-automatic production lines, a group of energetic R&D engineers, over 100 employees. We'll persist on providing our clients with excellent products and services.



DURABLE
L I G H T I N G

Factory Tour



Company Building



Die Bonding Line



Testing Room



Assembling Line



SMT Line



Packaging Line



Glue Dripping Line



Aging Test Area



Warehouse

Certificate



ISO9001



ETL



BIS



TUV CB



CE EMC



CE RoHS



CE LVD



CE Reach



CE RED



LM-80



TER



IP65/68

INDEX

Flexible Neon Strip Lights

DBN6032	P07
DBN3025	P09
DBN2020	P11
DBN1616	P13
DBN1212	P15
DBN1010	P17
DBN0606.....	P19
DBN1225	P21
DBN1220	P23
DBN0820.....	P25
DBN0817.....	P27
DBN0613	P29
DBN0612.....	P31
DBN0408.....	P33

Flexible LED Wall Washer

DBW2527	P37
DBW1616	P39
DBW2311	P41
DBW2009	P43
DBW1409	P45

Flexible LED Strip Light

Classic Series	P49
Ultra Narrow Series	P51
Ultra Wide Series	P53
High Efficacy Series	P55
Long Cascade Series	P57
High Voltage Series	P59



Side-bend


Flexible Neon Series



Top-bend

Flexible Neon Series

Silicone Neon Strip Solution

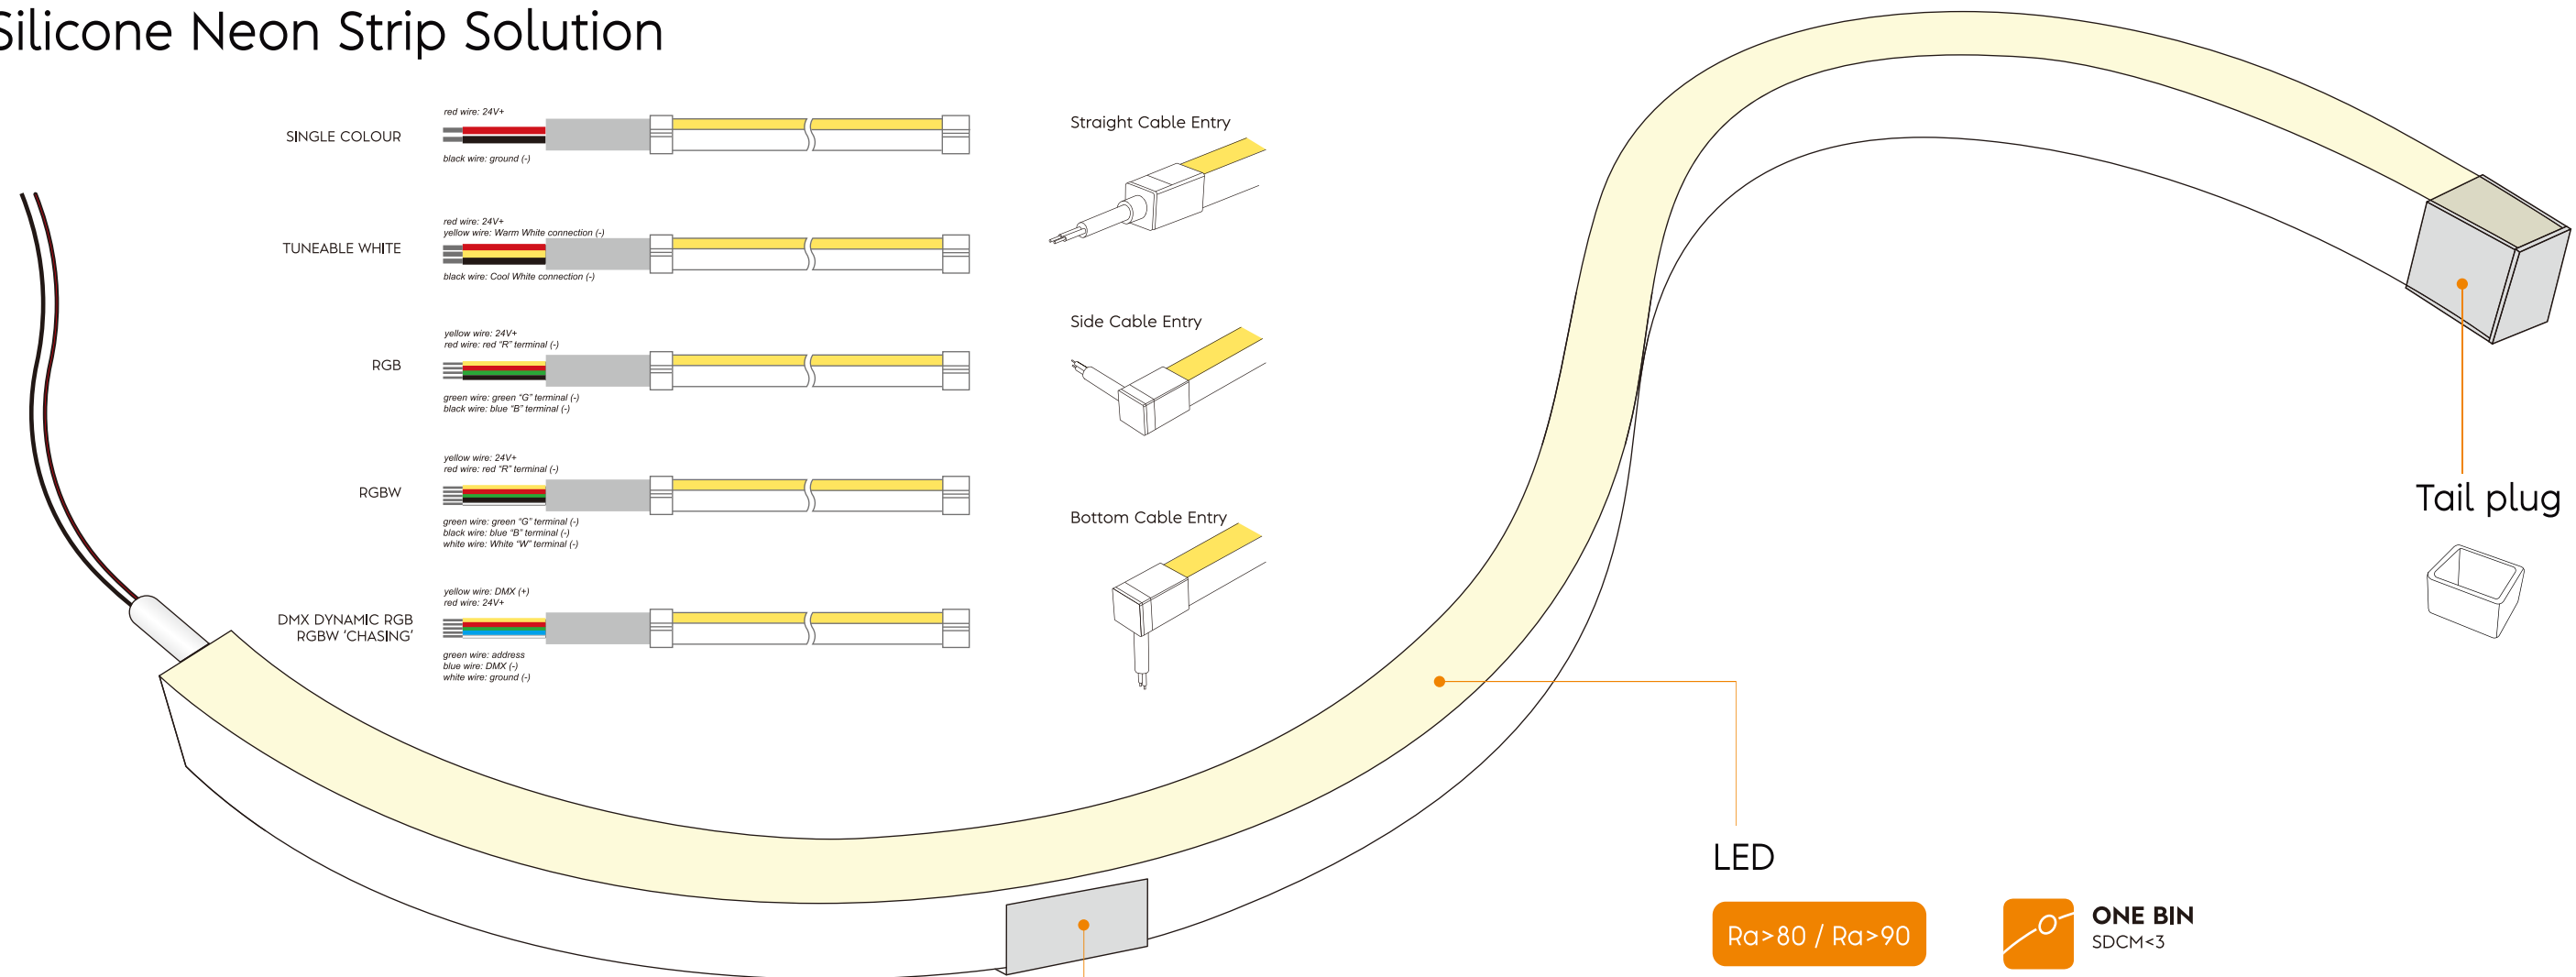

- SINGLE COLOUR**
red wire: 24V+
black wire: ground (-)
- TUNEABLE WHITE**
red wire: 24V+
yellow wire: Warm White connection (-)
black wire: Cool White connection (-)
- RGB**
yellow wire: 24V+
red wire: red "R" terminal (-)
green wire: green "G" terminal (-)
black wire: blue "B" terminal (-)
- RGBW**
yellow wire: 24V+
red wire: red "R" terminal (-)
green wire: green "G" terminal (-)
black wire: blue "B" terminal (-)
white wire: White "W" terminal (-)
- DMX DYNAMIC RGB
RGBW 'CHASING'**
yellow wire: DMX (+)
red wire: 24V+
green wire: address
blue wire: DMX (-)
white wire: ground (-)

- Straight Cable Entry**
- Side Cable Entry**
- Bottom Cable Entry**



Installation Accessories



Stainless Steel flexible clips Aluminium Mounting clips Aluminium Profile

LED

- Ra>80 / Ra>90**
- ONE BIN**
SDCM<3
- 2700 K 3000 K 3500 K 4000 K 5000 K 6500 K Dimmable
- Red Green Blue Pink Amber RGB RGBW DMX512


Flexible Neon Strip Lights

This range features durable silicon encapsulated LED neons with perfect homogenous and dot-free lighting output. Compared with traditional neon lightings, flexible neons are more energy efficient, more flexible and durable, easier to be installed. Each of them uses silicon extrusion tubes offering an excellent waterproof sealing, UV resistance, chemical stability against dust and protection against abrasion damages. These allround bendable luminaires are adapted to interior and exterior architectural lighting applications.

DBN6032	P07
DBN3025	P09
DBN2020	P11
DBN1616	P13
DBN1212	P15
DBN1010	P17
DBN0606	P19
DBN1225	P21
DBN1220	P23
DBN0820	P25
DBN0817	P27
DBN0613	P29
DBN0612	P31
DBN0408	P33

DBN6032

Flexible LED Neon Strip Light

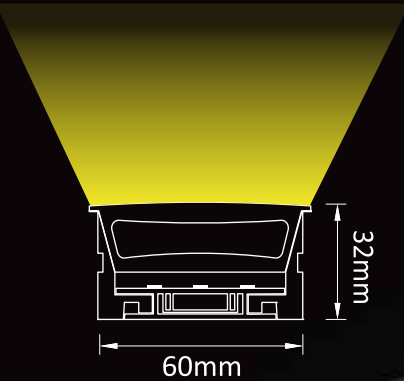


DURABLE
LIGHTING

Flexible Neon Series


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, etc.

Description

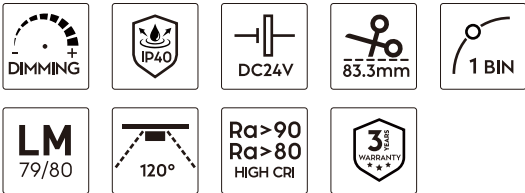

Dimensions

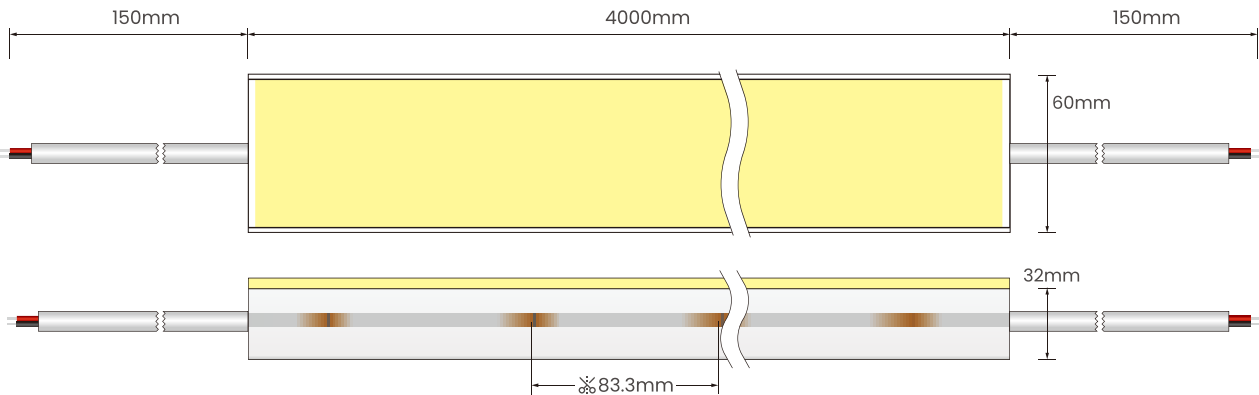


Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	7	252pcs	40W	2800lm/M	70lm/W	Ra>80/Ra>90	83.3mm
DC24V	4000K	2835	7	252pcs	40W	2800lm/M	70lm/W	Ra>80/Ra>90	83.3mm
DC24V	3000K	2835	7	252pcs	40W	2700lm/M	67lm/W	Ra>80/Ra>90	83.3mm
DC24V	2700-6500K	2835	14	504pcs	40W	2700lm/M	67lm/W	Ra>80/Ra>90	83.3mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN3025

Flexible LED Neon Strip Light

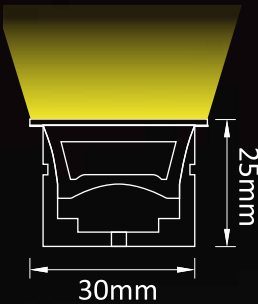


DURABLE
LIGHTING

Flexible Neon Series


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, sigle color, etc.

Description

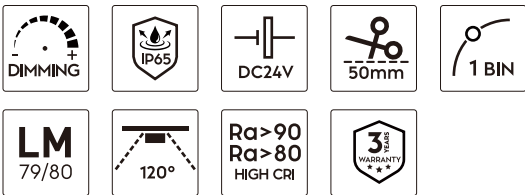

Dimensions

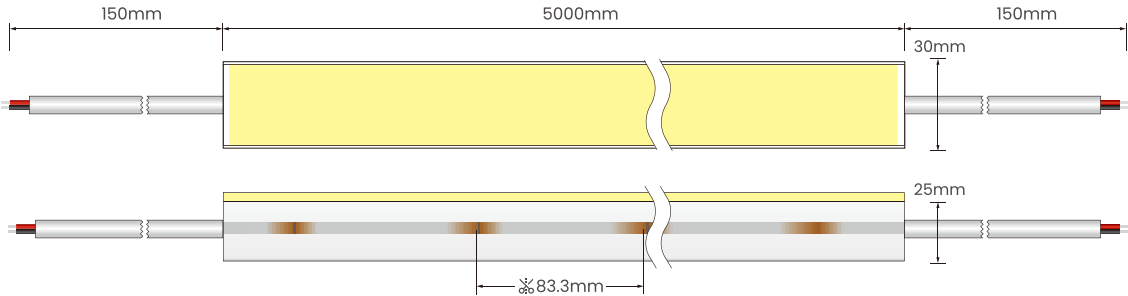

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	7	168pcs	25W	1600lm/M	65lm/W	Ra>80/Ra>90	83.3mm
DC24V	4000K	2835	7	168pcs	25W	1600lm/M	65lm/W	Ra>80/Ra>90	83.3mm
DC24V	3000K	2835	7	168pcs	25W	1600lm/M	65lm/W	Ra>80/Ra>90	83.3mm
DC24V	2700-6500K	2835	14	336pcs	15W+15W	1140lm/M	76lm/W	Ra>80/Ra>90	83.3mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN2020

Flexible LED Neon Strip Light


- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, sigle color, RGB, RGBW, etc.



DURABLE
LIGHTING


Flexible Neon Series

Top-bend

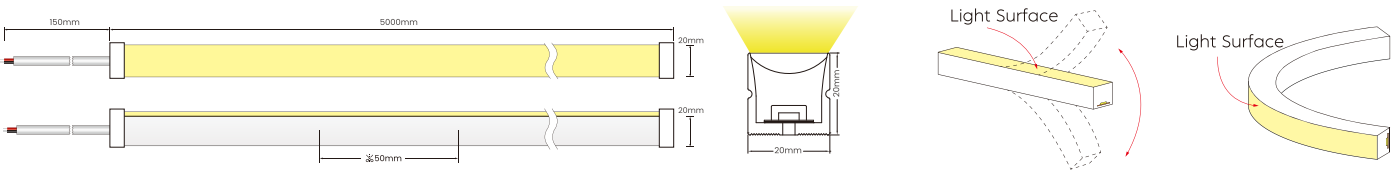

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	12W	540lm/M	45lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	12W	540lm/M	45lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	12W	500lm/M	42lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	12W	500lm/M	42lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	255lm/M	17lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	400lm/M	22lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	14	84pcs	15W	330lm/M	22lm/W	/	166.6mm

Side-bend

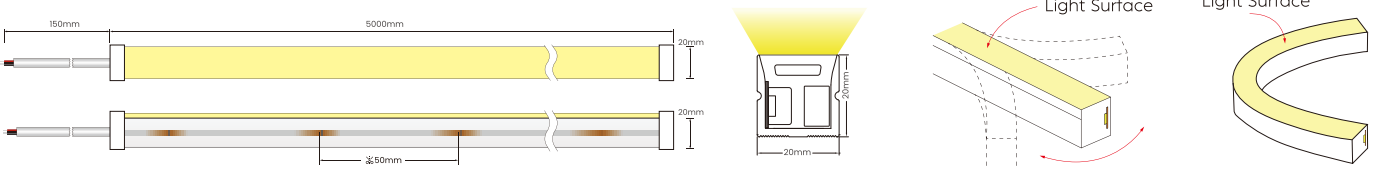

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	12W	480lm/M	40lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	12W	480lm/M	40lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	12W	450lm/M	38lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	12W	450lm/M	38lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	255lm/M	17lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	400lm/M	22lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	14	84pcs	15W	330lm/M	22lm/W	/	166.6mm

DBN1616

Flexible LED Neon Strip Light




- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, sigle color, RGB, RGBW, etc.



DURABLE
LIGHTING


Flexible Neon Series

Top-bend

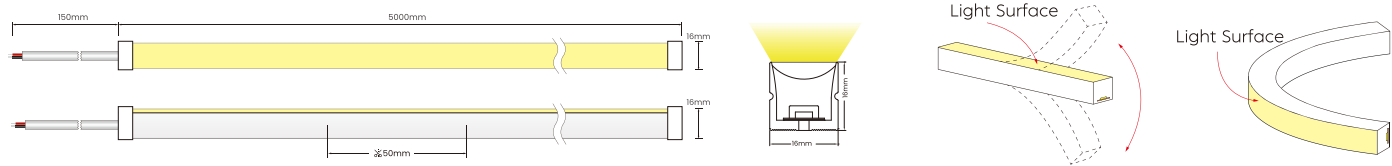

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	13.5W	540lm/M	45lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	13.5W	540lm/M	45lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	13.5W	500lm/M	42lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	13.5W	500lm/M	42lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	255lm/M	17lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	400lm/M	22lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	14	84pcs	15W	330lm/M	22lm/W	/	166.6mm

Side-bend

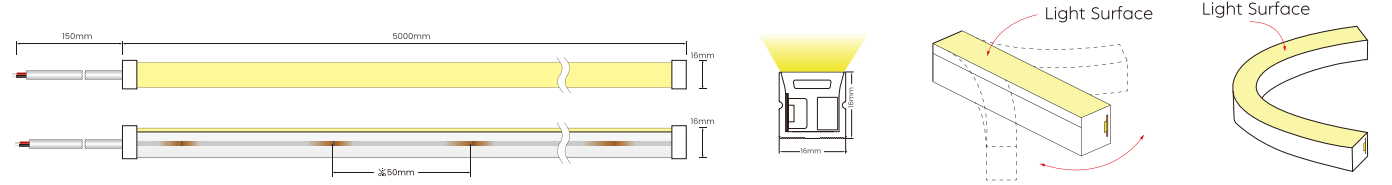

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	13.5W	480lm/M	40lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	13.5W	480lm/M	40lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	13.5W	450lm/M	38lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	13.5W	450lm/M	38lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	255lm/M	17lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	400lm/M	22lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	14	84pcs	15W	330lm/M	22lm/W	/	166.6mm

DBN1212

Flexible LED Neon Strip Light


- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, etc.



DURABLE
LIGHTING


Flexible Neon Series

Top-bend

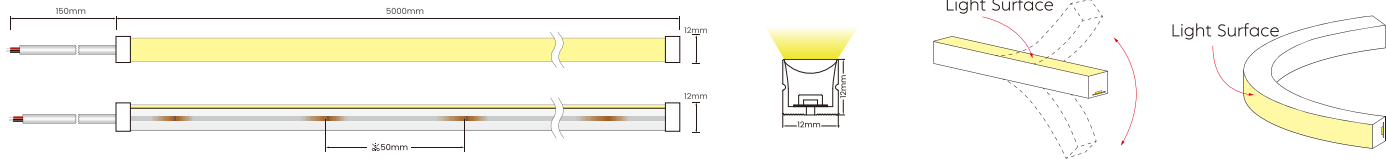

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	14.4W	930lm/M	64lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	14.4W	930lm/M	64lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	14.4W	900lm/M	62lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	14.4W	900lm/M	62lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14.4W	350lm/M	25lm/W	/	50mm

Side-bend

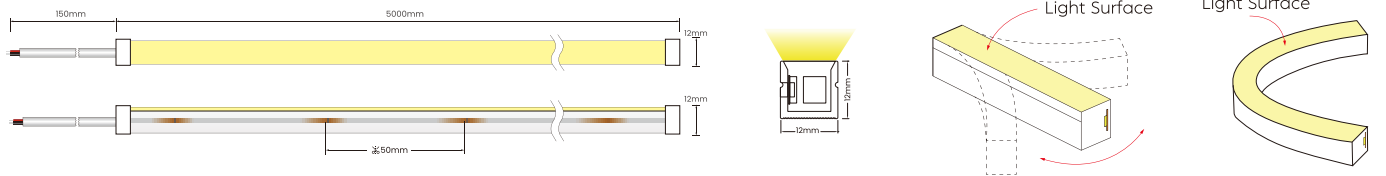

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	14.4W	910lm/M	62lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	14.4W	910lm/M	62lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	14.4W	890lm/M	60lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	14.4W	890lm/M	60lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14.4W	350lm/M	25lm/W	/	50mm

DBN1010

Flexible LED Neon Strip Light


- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, etc.



DURABLE
LIGHTING


Flexible Neon Series

Top-bend

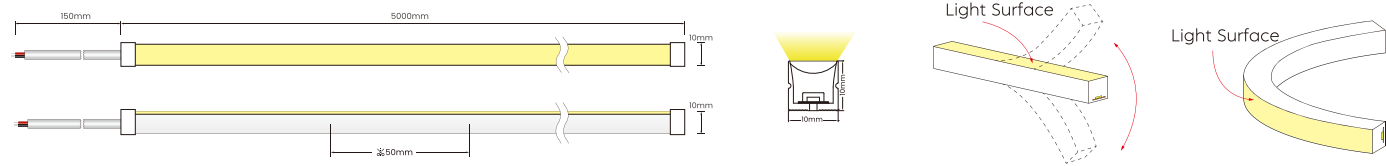

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	140pcs	9.6W	670lm/M	85lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	140pcs	9.6W	670lm/M	85lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	140pcs	9.6W	640lm/M	80lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	140pcs	9.6W	640lm/M	80lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14W	350lm/M	25lm/W	/	50mm

Side-bend

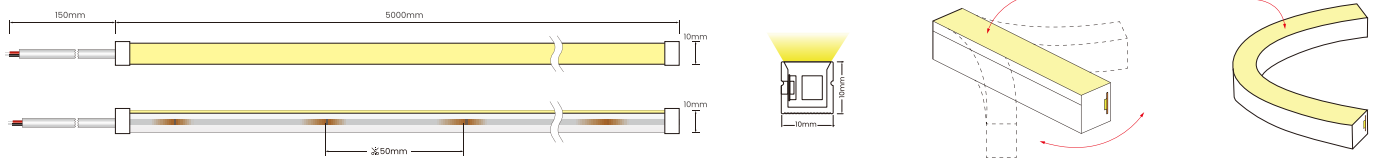

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	140pcs	9.6W	625lm/M	65lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	140pcs	9.6W	625lm/M	65lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	140pcs	9.6W	600lm/M	62lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	140pcs	9.6W	600lm/M	62lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14W	350lm/M	25lm/W	/	50mm


DBN0606

Flexible LED Neon Strip Light


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, etc.


Description

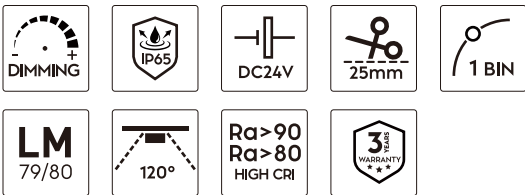

Dimensions

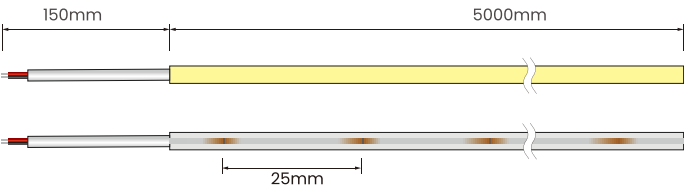

Top-bend

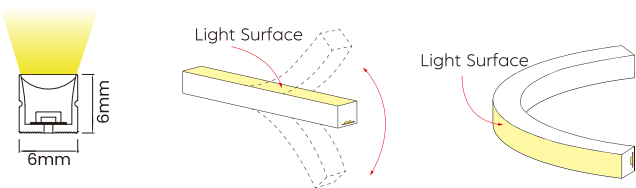

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2216	6	240pcs	8W	440lm/M	55lm/W	Ra>80/Ra>90	25mm
DC24V	4000K	2216	6	240pcs	8W	440lm/M	55lm/W	Ra>80/Ra>90	25mm
DC24V	3000K	2216	6	240pcs	8W	415lm/M	52lm/W	Ra>80/Ra>90	25mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN1225


Flexible LED Neon Strip Light




Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, RGBW, etc.

Description

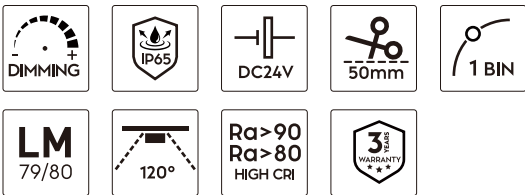

Dimensions

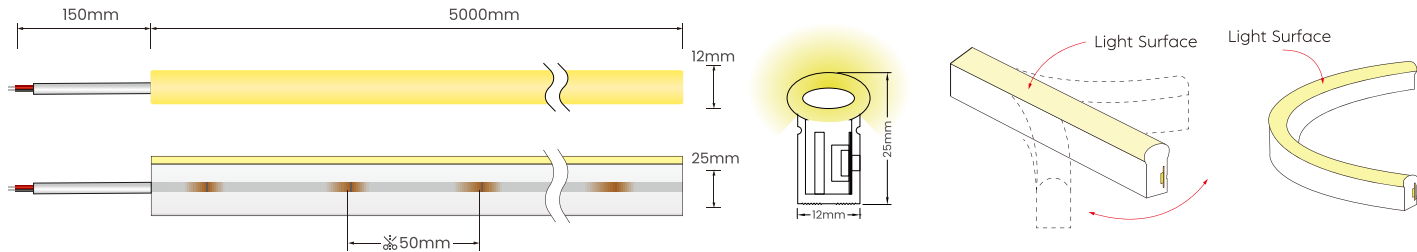


Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	12W	380lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	12W	380lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	12W	360lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	12W	360lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	195lm/M	13lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	320lm/M	18lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	14	84pcs	15W	270lm/M	18lm/W	/	166.6mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN1220


Flexible LED Neon Strip Light

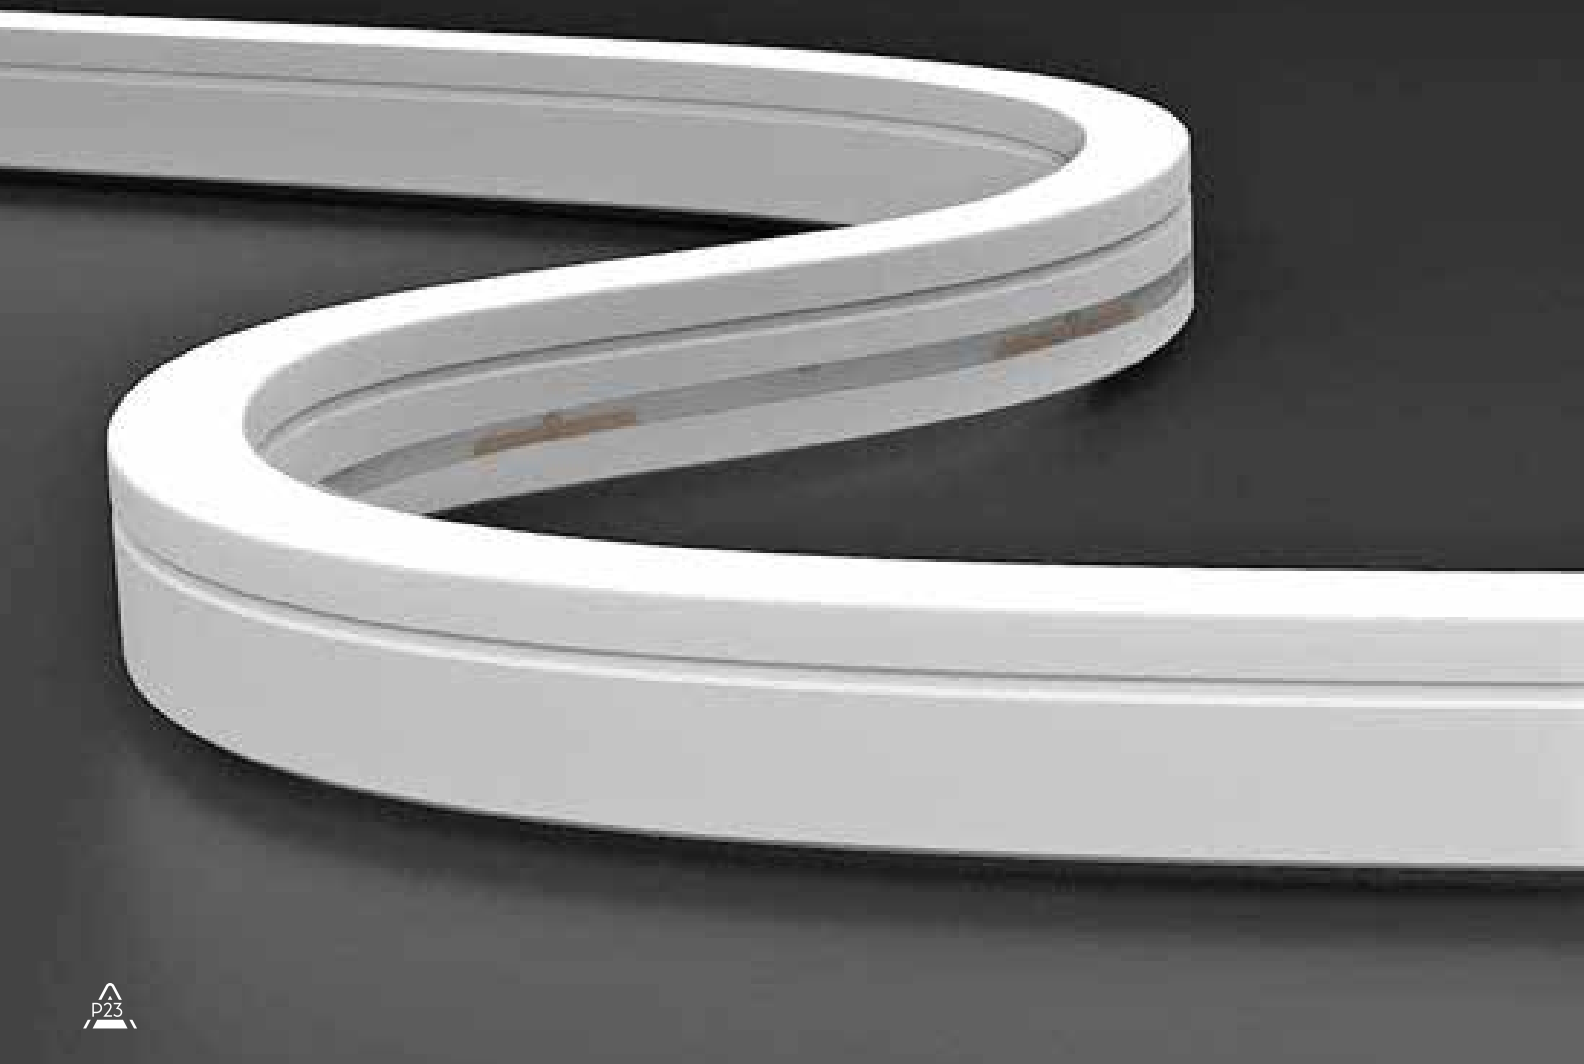



Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, RGBW, etc.


Description

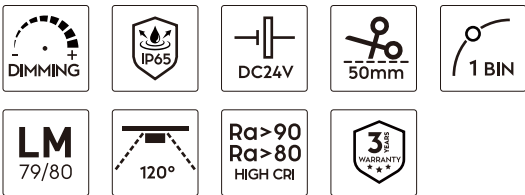

Dimensions

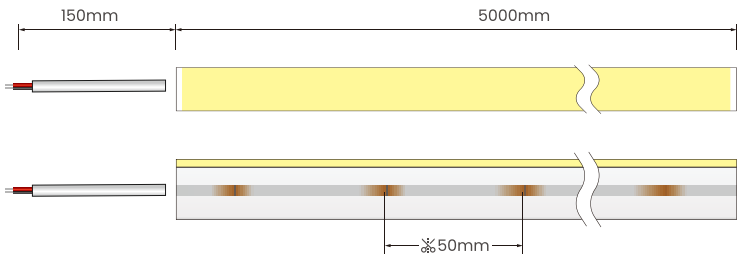

Side-bend

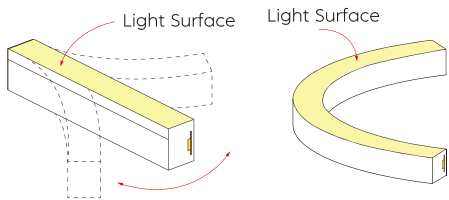

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	12W	380lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	12W	380lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	12W	360lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	12W	360lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	195lm/M	13lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	320lm/M	18lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	14	84pcs	15W	270lm/M	18lm/W	/	166.6mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.


DBN0820

Flexible LED Neon Strip Light


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, RGBW, etc.

Description

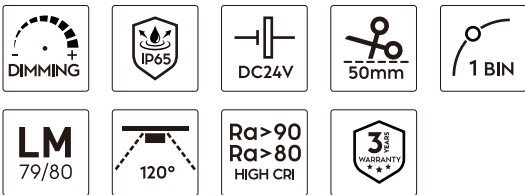

Dimensions

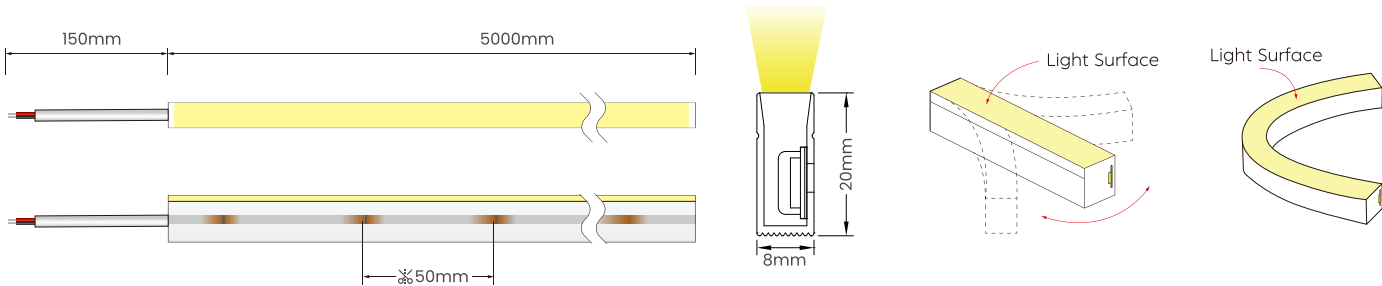

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	12W	380lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	12W	380lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	12W	360lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	2700-6500K	2835	6	120pcs	12W	360lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	5050	6	84pcs	15W	195lm/M	13lm/W	/	71.4mm
DC24V	RGBW	5050	6	84pcs	18W	320lm/M	18lm/W	Ra>80/Ra>90	71.4mm
DC24V	Pixel RGBW	5050	10	80pcs	15W	150lm/M	10lm/W	/	125mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.


DBN0817

Flexible LED Neon Strip Light


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, etc.


Description

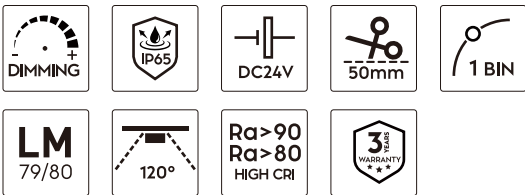

Dimensions

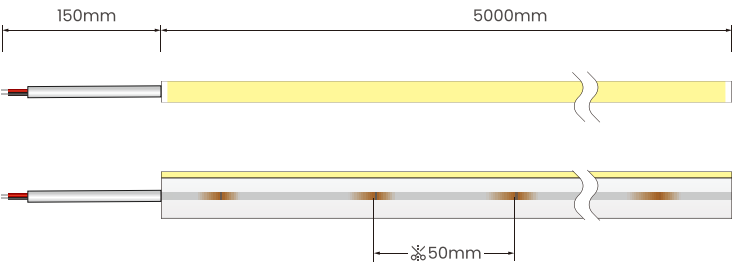

Side-bend

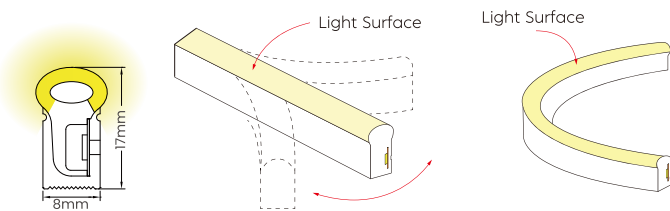

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	9.6W	300lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	9.6W	300lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	9.6W	280lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14W	155lm/M	11lm/W	/	50mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN0613

Flexible LED Neon Strip Light




DURABLE
LIGHTING

Flexible Neon Series


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, etc.

Description

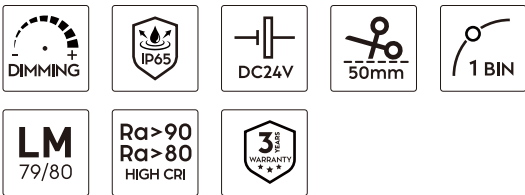

Dimensions

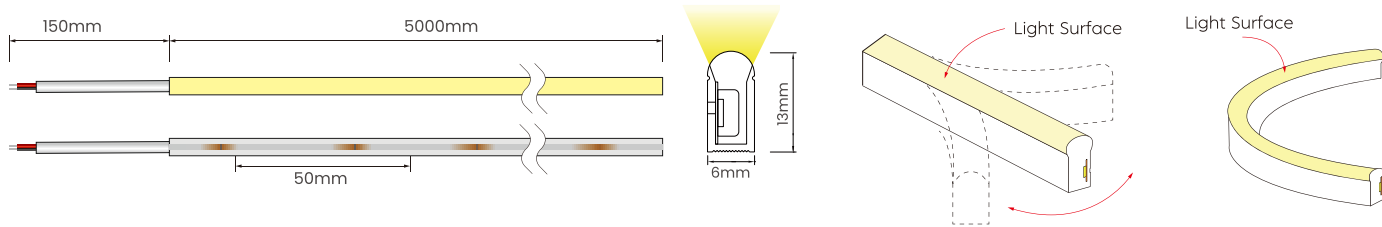

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	9.6W	300lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	9.6W	300lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	9.6W	280lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14W	155lm/M	11lm/W	/	50mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN0612


Flexible LED Neon Strip Light




Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, etc.

Description

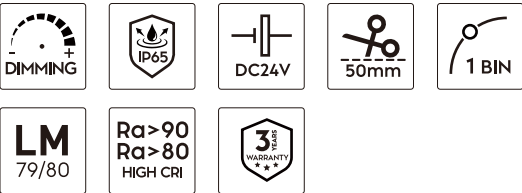

Dimensions

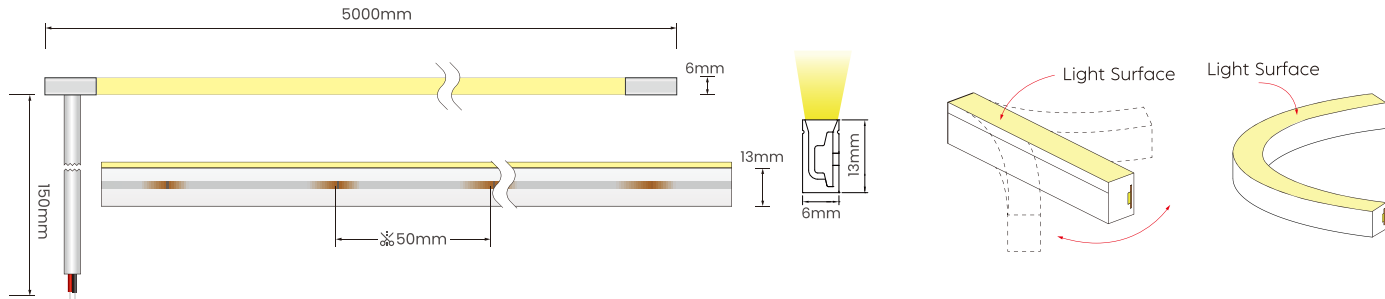

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	120pcs	9.6W	300lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	6	120pcs	9.6W	300lm/M	32lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	6	120pcs	9.6W	280lm/M	30lm/W	Ra>80/Ra>90	50mm
DC24V	RGB	4040	6	120pcs	14W	155lm/M	11lm/W	/	50mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBN0408

Flexible LED Neon Strip Light




DURABLE
LIGHTING

Flexible Neon Series


Features

- Good flexibility, using high quality food grade silicon
- Flexible & easy installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, etc.

Description

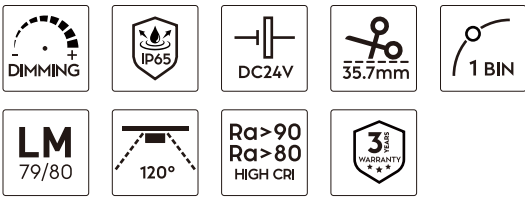

Dimensions

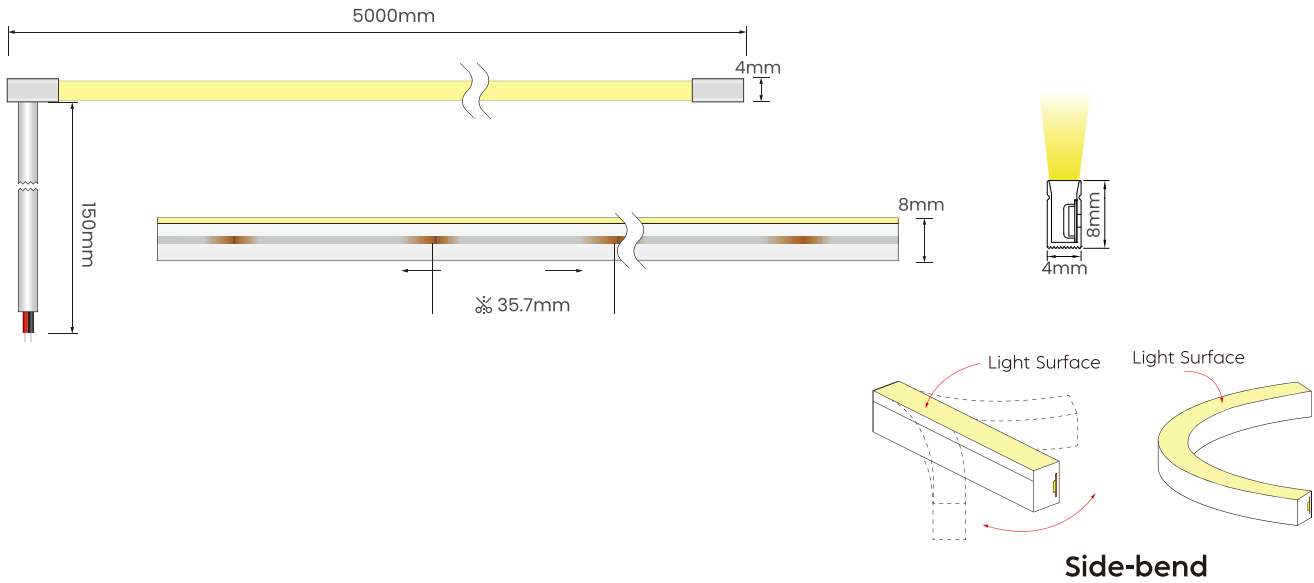

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	6	168pcs	8W	176lm/M	22lm/W	Ra>80/Ra>90	35.7mm
DC24V	4000K	2835	6	168pcs	8W	176lm/M	22lm/W	Ra>80/Ra>90	35.7mm
DC24V	3000K	2835	6	168pcs	8W	160lm/M	20lm/W	Ra>80/Ra>90	35.7mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.


Flexible LED Wall Washer

Our high quality flexible wall washers are ideal for achieving a flawless wall washing effect. CE, UL, RoHS and LM80 certificated, these durable and reliable luminaires have excellent waterproof performance with IP degree up to IP67. Several single and dual beam angle lenses are available to meet your different application requirements. High luminous efficiency and light transmittance, flexible and easy installation, makes our flexible wall washers suitable for walls of various textures, and can be used interior and exterior. Contact us for more details.

DBW2527	P37
DBW1616	P39
DBW2311	P41
DBW2009	P43
DBW1409	P45

DBW2527


Flexible LED Wall Washer

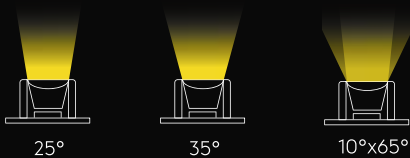


Features

- Good flexibility, using high quality raw material
- Flexible & effortless installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, RGBW, etc.

Description

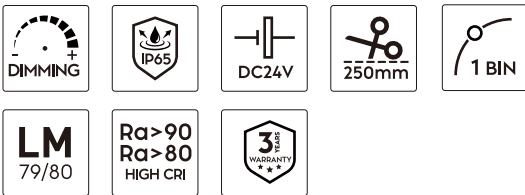

Dimensions

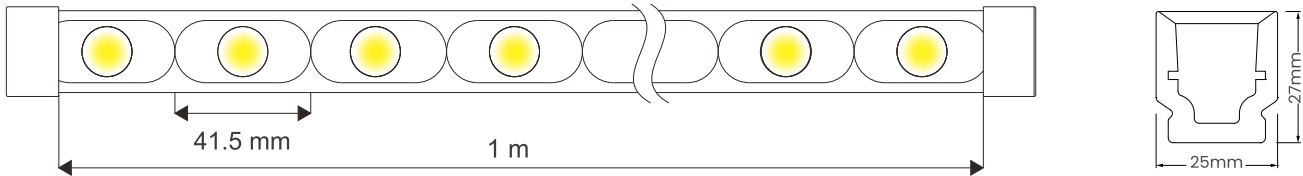

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	3030	3	24pcs	24W	1350lm/M	55lm/W	Ra>80/Ra>90	125mm
DC24V	4000K	3030	3	24pcs	24W	1350lm/M	55lm/W	Ra>80/Ra>90	125mm
DC24V	3000K	3030	3	24pcs	24W	1320lm/M	55lm/W	Ra>80/Ra>90	125mm
DC24V	2700K-6500K	3030	6	24pcs	24W	960lm/M	40lm/W	Ra>80/Ra>90	250mm
DC24V	RGB	3030	6	24pcs	24W	528lm/M	22lm/W	/	250mm
DC24V	RGBW	3535	6	24pcs	24W	960lm/M	40lm/W	Ra>80/Ra>90	250mm
DC24V	2700K-6500K Pixel	3030	6	24pcs	24W	840lm/M	35lm/W	/	250mm
DC24V	RGBW+Pixel	3535	6	24pcs	24W	960lm/M	40lm/W	/	250mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBW1616


Flexible LED Wall Washer




Features

- Good flexibility, using high quality raw material
- Flexible & effortless installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, RGBW, etc.

Description

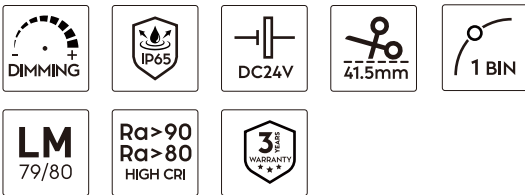

Dimensions

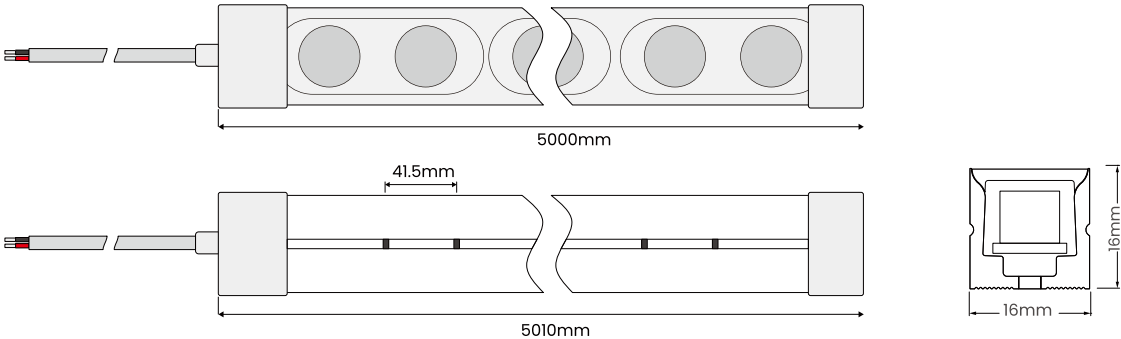

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	3	48pcs	22W	1760lm/M	80lm/W	Ra>80/Ra>90	41.5mm
DC24V	4000K	2835	3	48pcs	22W	1760lm/M	80lm/W	Ra>80/Ra>90	41.5mm
DC24V	3000K	2835	3	48pcs	22W	1800lm/M	82lm/W	Ra>80/Ra>90	41.5mm
DC24V	2700K-6500K	3030	6	24pcs	22W	1800lm/M	82lm/W	Ra>80/Ra>90	41.5mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBW2311


Flexible LED Wall Washer




Features

- Good flexibility, using high quality raw material
- Flexible & effortless installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, etc.

Description

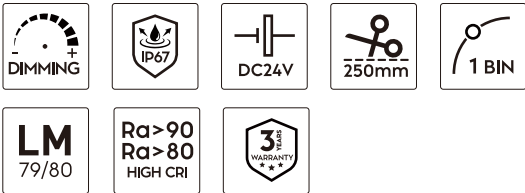

Dimensions

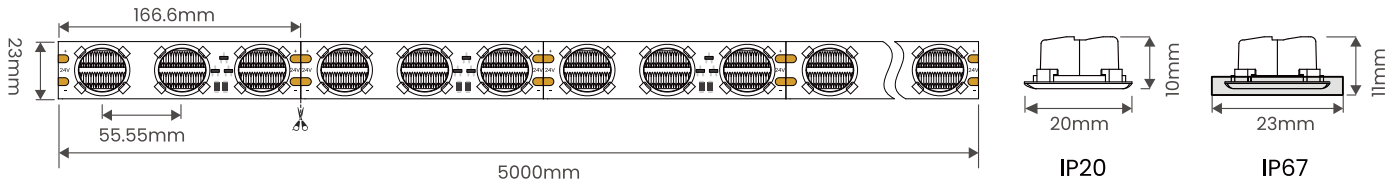



Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	3030	3	24pcs	24W	2160lm/M	90lm/W	Ra>80/Ra>90	125mm
DC24V	4000K	3030	3	24pcs	24W	2160lm/M	90lm/W	Ra>80/Ra>90	125mm
DC24V	3000K	3030	3	24pcs	24W	2040lm/M	85lm/W	Ra>80/Ra>90	125mm
DC24V	2700-6500K	3030	6	24pcs	24W	1440lm/M	60lm/W	Ra>80/Ra>90	250mm
DC24V	2700-6500K Pixel	3030	6	24pcs	24W	1440lm/M	60lm/W	/	250mm
DC24V	RGB	3030	6	24pcs	24W	1000lm/M	41lm/W	/	250mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBW2009


Flexible LED Wall Washer

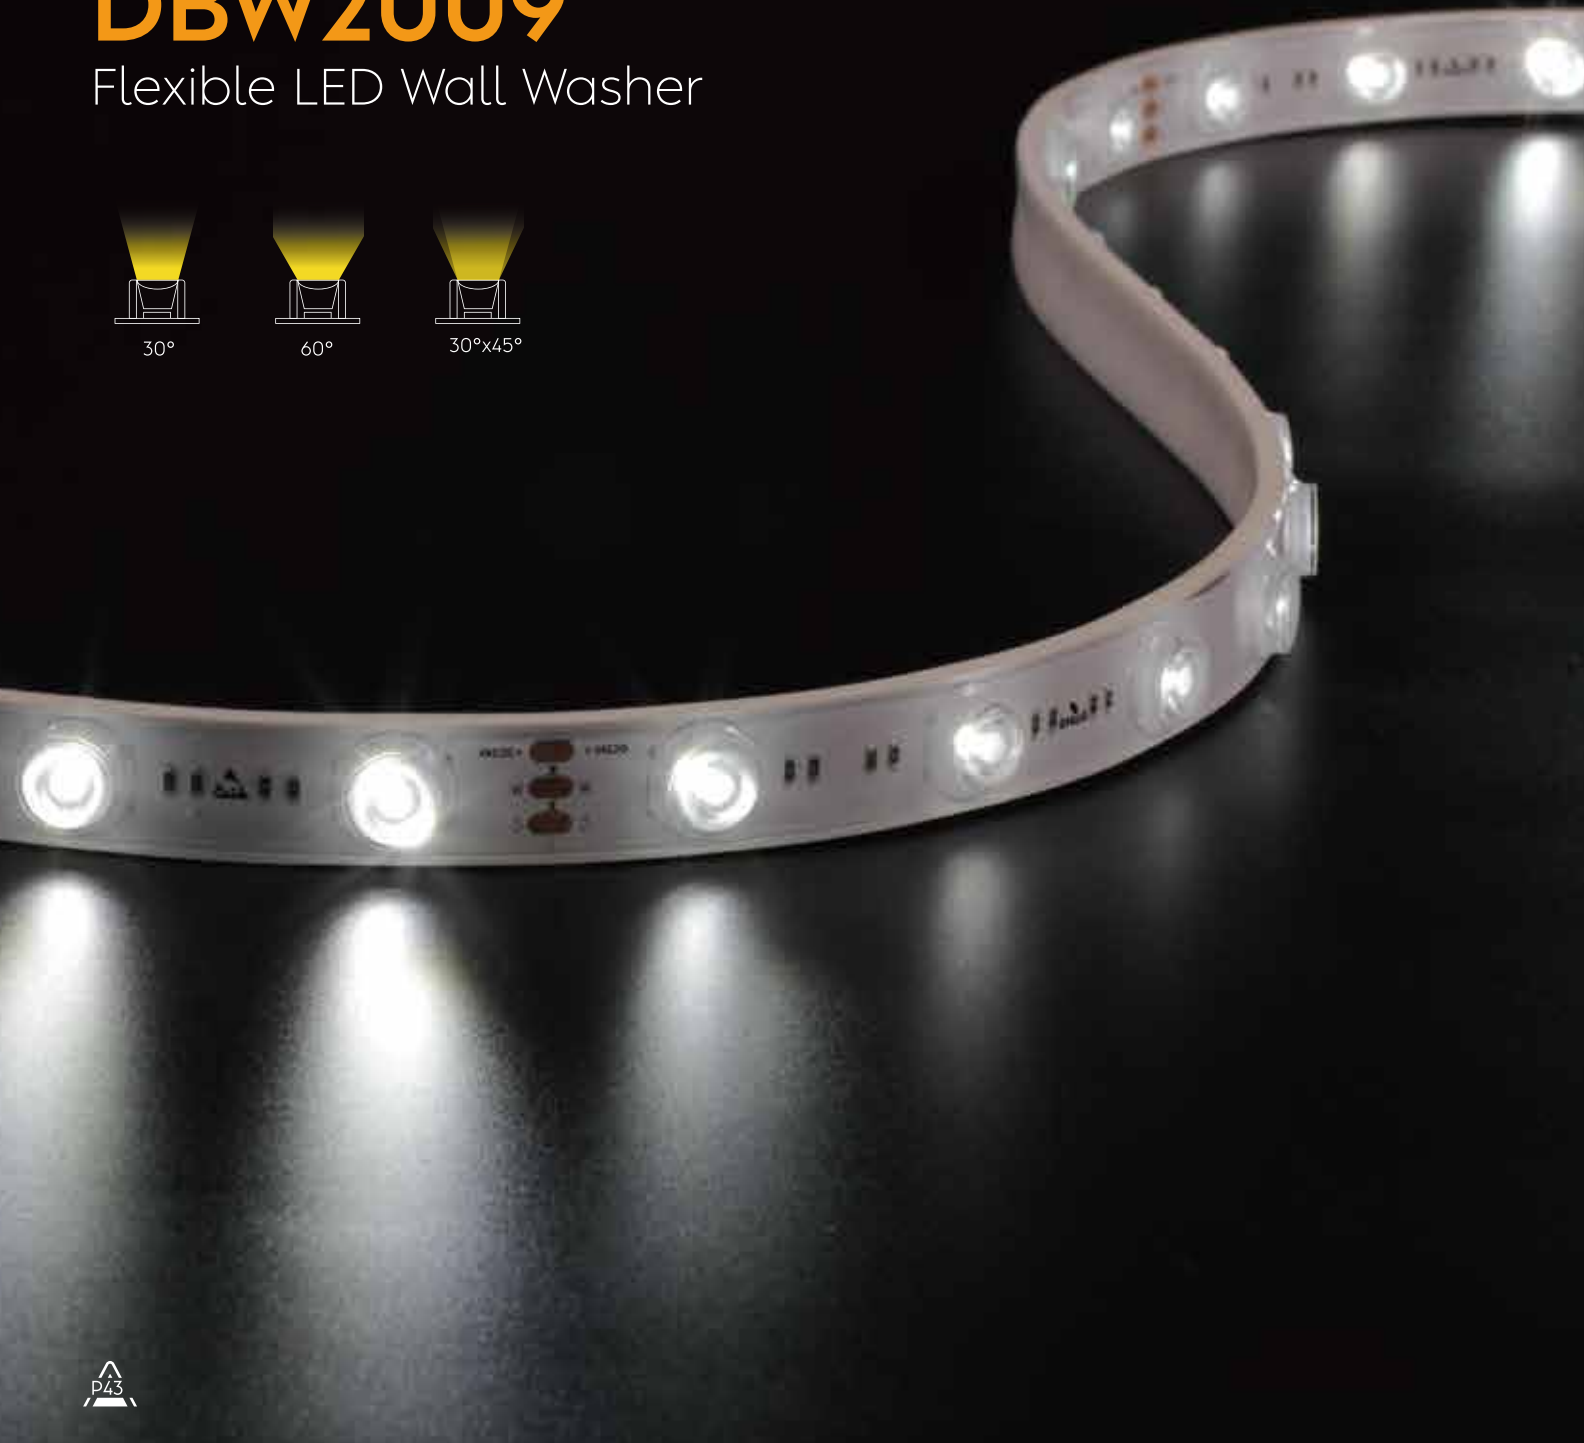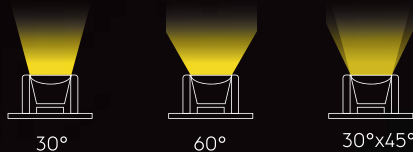


Features

- Good flexibility, using high quality raw material
- Flexible & effortless installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, RGB, RGBW, etc.

Description

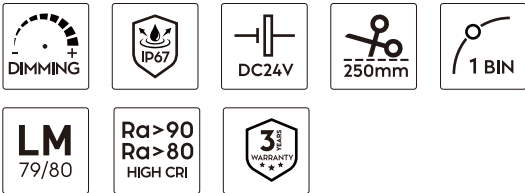

Dimensions

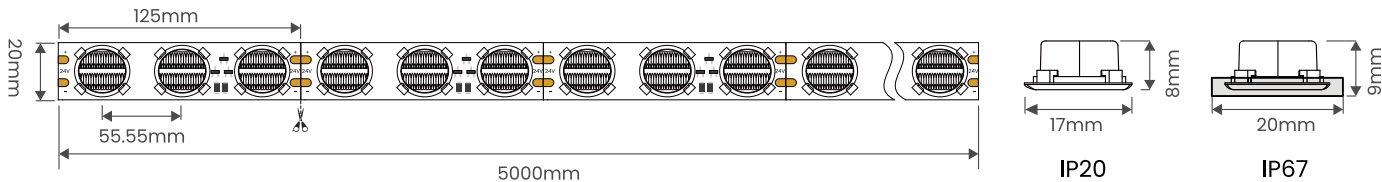


Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	3030	3	24pcs	24W	2160lm/M	90lm/W	Ra>80/Ra>90	125mm
DC24V	4000K	3030	3	24pcs	24W	2160lm/M	90lm/W	Ra>80/Ra>90	125mm
DC24V	3000K	3030	3	24pcs	24W	2040lm/M	85lm/W	Ra>80/Ra>90	125mm
DC24V	2700-6500K	3030	6	24pcs	24W	1440lm/M	60lm/W	Ra>80/Ra>90	250mm
DC24V	RGB	3030	6	24pcs	24W	960lm/M	40lm/W	/	250mm
DC24V	2700-6500K Pixel	3030	6	24pcs	24W	1440lm/M	60lm/W	Ra>80/Ra>90	250mm
DC24V	RGBW+Pixel	3535	10	40pcs	24W	1200lm/M	50lm/W	/	250mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

DBW1409

Flexible LED Wall Washer




DURABLE
LIGHTING

Smart Wall Wash Series


Features

- Good flexibility, using high quality raw material
- Flexible & effortless installation
- ERP standard spectroscopic, single BIN supply, good color consistency
- High luminous efficiency and light transmittance
- Wide range of colors available. Single CCT, single color, etc.

Description

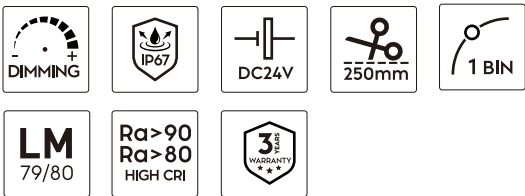

Dimensions

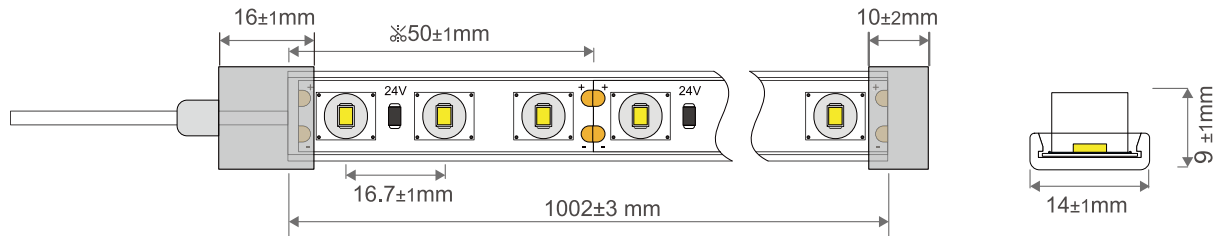

Optical Parameters

Voltage	Color	LED Type	LEDs Cutting	LEDs/M	Max. Power	Luminous Flux	Efficacy	CRI	Min. Cutting
DC24V	6500K	2835	3	60pcs	18W	1350lm/M	75lm/W	Ra>80/Ra>90	50mm
DC24V	4000K	2835	3	60pcs	18W	1350lm/M	75lm/W	Ra>80/Ra>90	50mm
DC24V	3000K	2835	3	60pcs	18W	1280lm/M	70lm/W	Ra>80/Ra>90	50mm

NOTE: 1. Above parameters are based on 1M standard products;
2. ±10% is allowed for power and luminous flux;
3. Above parameters are typical values.

Flexible LED Strip Light

With the development of lighting technology, LED strips have been becoming a popular and ideal choice for both commercial and residential lighting solutions.

From IP20 to IP67, this series includes various efficient crafted light strips to meet the requirements of a wide range of applications.

CE, UL, RoHS certificated, OEM/ ODM available.

Classic Series	P49
Ultra Narrow Series	P51
Ultra Wide Series	P53
High Efficacy Series	P55
Long Cascade Series	P57
High Voltage Series	P59

Classic Series



DC24V 2835SMD 5M/Roll

- High quality SMD2835/ 5050 LED, LM80 approved.
- Thick double layer 2oz copper PCB.
- Single BIN supply, good color consistency (3-step MacAdam).
- Economical options suitable for interior and exterior applications.




60LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	60pcs	4.8W	650lm/M	80+/90+	50mm	IP20
DC24V	4000K	2835	60pcs	4.8W	670lm/M	80+/90+	50mm	IP20
DC24V	6500K	2835	60pcs	4.8W	680lm/M	80+/90+	50mm	IP20
DC24V	RGB	5050	60pcs	4.8W	35lm/M	80+/90+	50mm	IP20
DC24V	3000K	2835	60pcs	4.8W	650lm/M	80+/90+	50mm	IP65
DC24V	4000K	2835	60pcs	4.8W	670lm/M	80+/90+	50mm	IP65
DC24V	6500K	2835	60pcs	4.8W	680lm/M	80+/90+	50mm	IP65
DC24V	RGB	5050	60pcs	4.8W	35lm/M	80+/90+	50mm	IP65
DC24V	3000K	2835	60pcs	4.8W	650lm/M	80+/90+	50mm	IP68
DC24V	4000K	2835	60pcs	4.8W	670lm/M	80+/90+	50mm	IP68
DC24V	6500K	2835	60pcs	4.8W	680lm/M	80+/90+	50mm	IP68
DC24V	RGB	5050	60pcs	4.8W	35lm/M	80+/90+	50mm	IP68



IP20 IP65 IP68



IP20 IP65 IP68

120LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	120pcs	9.6W	1350lm/M	80+/90+	25mm	IP20
DC24V	4000K	2835	120pcs	9.6W	1450lm/M	80+/90+	25mm	IP20
DC24V	6500K	2835	120pcs	9.6W	1550lm/M	80+/90+	25mm	IP20
DC24V	RGB	5050	120pcs	9.6W	55lm/M	80+/90+	25mm	IP20
DC24V	3000K	2835	120pcs	9.6W	1350lm/M	80+/90+	25mm	IP65
DC24V	4000K	2835	120pcs	9.6W	1450lm/M	80+/90+	25mm	IP65
DC24V	6500K	2835	120pcs	9.6W	1550lm/M	80+/90+	25mm	IP65
DC24V	RGB	5050	120pcs	9.6W	55lm/M	80+/90+	25mm	IP65
DC24V	3000K	2835	120pcs	9.6W	1350lm/M	80+/90+	25mm	IP68
DC24V	4000K	2835	120pcs	9.6W	1450lm/M	80+/90+	25mm	IP68
DC24V	6500K	2835	120pcs	9.6W	1550lm/M	80+/90+	25mm	IP68
DC24V	RGB	5050	120pcs	9.6W	55lm/M	80+/90+	25mm	IP68



IP20 IP65 IP68



IP20 IP65 IP68

Ultra Narrow Series

DC24V 4mm/ 5mm/ 6mm PBC

- High quality SMD2216 / 2835 LED, LM80 approved
- Thick double layer 2oz copper PCB
- Single BIN supply, good color consistency (3-step MacAdam)
- Perfectly illuminate narrow coves, cabinetry fixtures, etc. The S-shape strip can be used for illuminating channel letters.


4mm PCB

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2216	120pcs	7.2W	1050lm/M	80+/90+	25mm	IP20
DC24V	4000K	2216	120pcs	7.2W	1150lm/M	80+/90+	25mm	IP20
DC24V	6500K	2216	120pcs	7.2W	1150lm/M	80+/90+	25mm	IP20




5mm PCB

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	120pcs	9.6W	1450lm/M	80+/90+	33.3mm	IP20
DC24V	4000K	2835	120pcs	9.6W	1500lm/M	80+/90+	33.3mm	IP20
DC24V	6500K	2835	120pcs	9.6W	1550lm/M	80+/90+	33.3mm	IP20



6mm (S-shape) PCB

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC12V	3000K	2835	120pcs	7.2W	940lm/M	80+/90+	50mm	IP20
DC12V	4000K	2835	120pcs	7.2W	960lm/M	80+/90+	50mm	IP20
DC12V	6500K	2835	120pcs	7.2W	960lm/M	80+/90+	50mm	IP20
DC24V	3000K	2835	120pcs	9.6W	1050lm/M	80+/90+	100mm	IP20
DC24V	4000K	2835	120pcs	9.6W	1150lm/M	80+/90+	100mm	IP20
DC24V	6500K	2835	120pcs	9.6W	1150lm/M	80+/90+	100mm	IP20

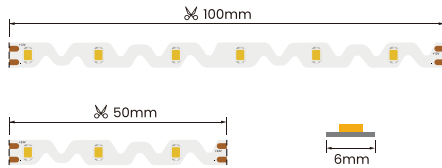

Ultra Wide Series

DC24V 15mm/ 20mm/ 30mm PBC

- High quality SMD2835 LED, LM80 approved, high brightness
- 3oz copper PCB, excellent heat dissipation
- Single BIN to ensure good color consistency (3-step MacAdam)
- Widely used in light boxes and linear lights, etc.


15mm PCB

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	96pcs	18W	1900lm/M	80+/90+	62.5mm	IP20
DC24V	4000K	2835	96pcs	18W	1950lm/M	80+/90+	62.5mm	IP20
DC24V	6500K	2835	96pcs	18W	1980lm/M	80+/90+	62.5mm	IP20




20mm PCB

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	120pcs	20W	2000lm/M	80+/90+	50mm	IP20
DC24V	4000K	2835	120pcs	20W	2050lm/M	80+/90+	50mm	IP20
DC24V	6500K	2835	120pcs	20W	2100lm/M	80+/90+	50mm	IP20



30mm PCB

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	144pcs	24W	2400lm/M	80+/90+	41.7mm	IP20
DC24V	4000K	2835	144pcs	24W	2450lm/M	80+/90+	41.7mm	IP20
DC24V	6500K	2835	144pcs	24W	2500lm/M	80+/90+	41.7mm	IP20

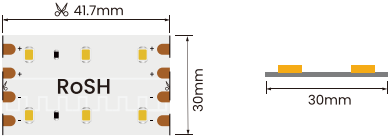

High Efficacy Series

DC24V SMD2835 150Lm/W

- High quality SMD2835 LED, LM80 approved
- High luminous efficacy, 150Lm/W
- 3oz copper PCB, excellent heat dissipation
- Single BIN to ensure good color consistency (3-step MacAdam)


150
lm/W

DURABLE
LIGHTING

Flexible LED Strip Light


64LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	64pcs	6W	850lm/M	80+/90+	125mm	IP20
DC24V	4000K	2835	64pcs	6W	880lm/M	80+/90+	125mm	IP20
DC24V	6500K	2835	64pcs	6W	900lm/M	80+/90+	125mm	IP20

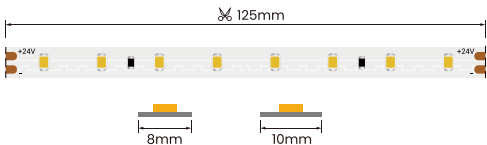


128LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	128pcs	12W	1700lm/M	80+/90+	62.5mm	IP20
DC24V	4000K	2835	128pcs	12W	1750lm/M	80+/90+	62.5mm	IP20
DC24V	6500K	2835	128pcs	12W	1800lm/M	80+/90+	62.5mm	IP20




160LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	160pcs	15W	2130lm/M	80+/90+	50mm	IP20
DC24V	4000K	2835	160pcs	15W	2180lm/M	80+/90+	50mm	IP20
DC24V	6500K	2835	160pcs	15W	2250lm/M	80+/90+	50mm	IP20




192LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	192pcs	18W	2550lm/M	80+/90+	41.7mm	IP20
DC24V	4000K	2835	192pcs	18W	2650lm/M	80+/90+	41.7mm	IP20
DC24V	6500K	2835	192pcs	18W	2700lm/M	80+/90+	41.7mm	IP20



240LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	240pcs	19.2W	2730lm/M	80+/90+	33.3mm	IP20
DC24V	4000K	2835	240pcs	19.2W	2800lm/M	80+/90+	33.3mm	IP20
DC24V	6500K	2835	240pcs	19.2W	2880lm/M	80+/90+	33.3mm	IP20



Long Cascade Series

DC24V SMD2835 25M/Roll

- High quality SMD2835 LED, LM80 approved
- Single Led cuttable, effortless customization at site
- Thick double layer 2oz copper PCB
- Single BIN to ensure good color consistency (3-step MacAdam)
- Features 60/ 120 LEDs per meter, energy efficient, excellent brightness for interior applications, as light boxes, signage lighting, cove lighting, cabinetry lighting, backlighting, etc.




DURABLE
LIGHTING


Flexible LED Strip Light

60LEDs/M

Voltage	Color	LED Type	PCB Width	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	8mm	60pcs	4.3W	650lm/M	80+/90+	16.7mm	IP20
DC24V	4000K	2835	8mm	60pcs	4.3W	655lm/M	80+/90+	16.7mm	IP20
DC24V	6500K	2835	8mm	60pcs	4.3W	660lm/M	80+/90+	16.7mm	IP20
DC24V	3000K	2835	8mm	60pcs	4.3W	650lm/M	80+/90+	16.7mm	IP65
DC24V	4000K	2835	8mm	60pcs	4.3W	670lm/M	80+/90+	16.7mm	IP65
DC24V	6500K	2835	8mm	60pcs	4.3W	680lm/M	80+/90+	16.7mm	IP65
DC24V	3000K	2835	8mm	60pcs	4.3W	650lm/M	80+/90+	16.7mm	IP68
DC24V	4000K	2835	8mm	60pcs	4.3W	670lm/M	80+/90+	16.7mm	IP68
DC24V	6500K	2835	8mm	60pcs	4.3W	680lm/M	80+/90+	16.7mm	IP68

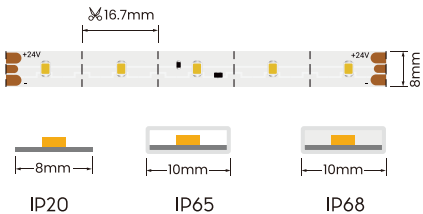


DC24V	3000K	2835	10mm	60pcs	12.8W	1140lm/M	80+/90+	16.7mm	IP20
DC24V	4000K	2835	10mm	60pcs	12.8W	1145lm/M	80+/90+	16.7mm	IP20
DC24V	6500K	2835	10mm	60pcs	12.8W	1150lm/M	80+/90+	16.7mm	IP20
DC24V	3000K	2835	10mm	60pcs	12.8W	1140lm/M	80+/90+	16.7mm	IP65
DC24V	4000K	2835	10mm	60pcs	12.8W	1145lm/M	80+/90+	16.7mm	IP65
DC24V	6500K	2835	10mm	60pcs	12.8W	1150lm/M	80+/90+	16.7mm	IP65
DC24V	3000K	2835	10mm	60pcs	12.8W	1140lm/M	80+/90+	16.7mm	IP68
DC24V	4000K	2835	10mm	60pcs	12.8W	1145lm/M	80+/90+	16.7mm	IP68
DC24V	6500K	2835	10mm	60pcs	12.8W	1150lm/M	80+/90+	16.7mm	IP68

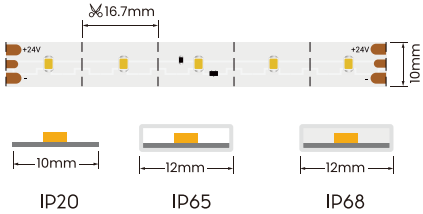


120LEDs/M

Voltage	Color	LED Type	PCB Width	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
DC24V	3000K	2835	8mm	120pcs	8.6W	1140lm/M	80+/90+	8.3mm	IP20
DC24V	4000K	2835	8mm	120pcs	8.6W	1145lm/M	80+/90+	8.3mm	IP20
DC24V	6500K	2835	8mm	120pcs	8.6W	1150lm/M	80+/90+	8.3mm	IP20
DC24V	3000K	2835	8mm	120pcs	8.6W	1140lm/M	80+/90+	8.3mm	IP65
DC24V	4000K	2835	8mm	120pcs	8.6W	1145lm/M	80+/90+	8.3mm	IP65
DC24V	6500K	2835	8mm	120pcs	8.6W	1150lm/M	80+/90+	8.3mm	IP65
DC24V	3000K	2835	8mm	120pcs	8.6W	1140lm/M	80+/90+	8.3mm	IP68
DC24V	4000K	2835	8mm	120pcs	8.6W	1145lm/M	80+/90+	8.3mm	IP68
DC24V	6500K	2835	8mm	120pcs	8.6W	1150lm/M	80+/90+	8.3mm	IP68

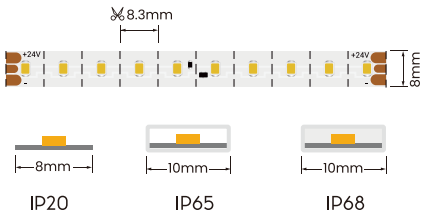

DC24V	3000K	2835	10mm	120pcs	12.8W	1350lm/M	80+/90+	8.3mm	IP20
DC24V	4000K	2835	10mm	120pcs	12.8W	1350lm/M	80+/90+	8.3mm	IP20
DC24V	6500K	2835	10mm	120pcs	12.8W	1400lm/M	80+/90+	8.3mm	IP20
DC24V	3000K	2835	10mm	120pcs	12.8W	1350lm/M	80+/90+	8.3mm	IP65
DC24V	4000K	2835	10mm	120pcs	12.8W	1350lm/M	80+/90+	8.3mm	IP65
DC24V	6500K	2835	10mm	120pcs	12.8W	1400lm/M	80+/90+	8.3mm	IP65
DC24V	3000K	2835	10mm	120pcs	12.8W	1300lm/M	80+/90+	8.3mm	IP68
DC24V	4000K	2835	10mm	120pcs	12.8W	1350lm/M	80+/90+	8.3mm	IP68
DC24V	6500K	2835	10mm	120pcs	12.8W	1400lm/M	80+/90+	8.3mm	IP68

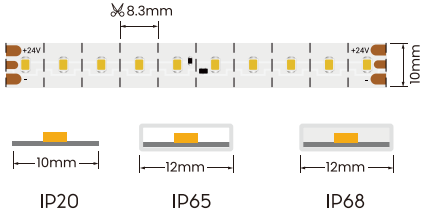

High Voltage Series

AC200-240V SMD2835 (Operating temp. -20°C ~ +45°C)

- High quality SMD2835 LED, LM80 approved
- Thick double layer 2oz copper PCB, excellent heat dissipation
- Single BIN to ensure good color consistency (3-step MacAdam)
- Accessories available, such as aluminum profile, connector, fix clip, waterproof end cap
- IP67 Rated, excellent UV resistance, chemical stability against dust and protection against abrasion damages.
- Adopted to interior and exterior lighting applications.






54LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
AC230V	3000K	2835	54pcs	7.6W	660lm/M	80+/90+	500mm	IP68
AC230V	4000K	2835	54pcs	7.6W	680lm/M	80+/90+	500mm	IP68
AC230V	6500K	2835	54pcs	7.6W	700lm/M	80+/90+	500mm	IP68

120LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
AC230V	3000K	2835	120pcs	12.8W	1100lm/M	80+/90+	100mm	IP68
AC230V	4000K	2835	120pcs	12.8W	1150lm/M	80+/90+	100mm	IP68
AC230V	6500K	2835	120pcs	12.8W	1200lm/M	80+/90+	100mm	IP68

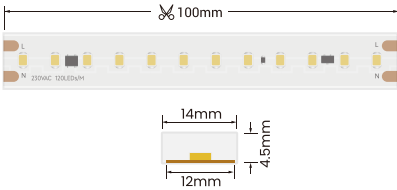

128LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
AC230V	3000K	2835	128pcs	15.2W	1300lm/M	80+/90+	500mm	IP68
AC230V	4000K	2835	128pcs	15.2W	1350lm/M	80+/90+	500mm	IP68
AC230V	6500K	2835	128pcs	15.2W	1400lm/M	80+/90+	500mm	IP68

132LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
AC230V	3000K	2835	132pcs	15.6W	1400lm/M	80+/90+	166.7mm	IP68
AC230V	4000K	2835	132pcs	15.6W	1450lm/M	80+/90+	166.7mm	IP68
AC230V	6500K	2835	132pcs	15.6W	1500lm/M	80+/90+	166.7mm	IP68

144LEDs/M

Voltage	Color	LED Type	LEDs/M	Power	Lumens	CRI	Cutting	IP Rating
AC230V	3000K	2835	144pcs	18.6W	1700lm/M	80+/90+	166.7mm	IP68
AC230V	4000K	2835	144pcs	18.6W	1750lm/M	80+/90+	166.7mm	IP68
AC230V	6500K	2835	144pcs	18.6W	1800lm/M	80+/90+	166.7mm	IP68

DURABLE
L I G H T I N G